



ARTICULATING VIDEO BORESCOPE OVERVIEW

Portable Video Borescope

Wide-Ranging Applications

- ◇ Component detection
- ◇ Vehicle inspections
- ◇ Building inspection
- ◇ Shipping and marine
- ◇ Package inspection
- ◇ Bomb detection
- ◇ Drug smuggling detection
- ◇ Search and seizure
- ◇ HVAC diagnostics
- ◇ Plumbing
- ◇ Manufacturing
- ◇ Aviation maintenance





Incredible Performance, Accessible Price

This portable video borescope delivers all the features you would expect in a high-end videoscope at a price that makes it accessible to almost everyone. Instead of settling for a fiber optic scope or separate solutions for photo and video, learn more about what our borescope can do for you.

With a performance-minded borescope at such a great price, why settle for an inferior product?

Nearly six years in development, this articulating video borescope breaks new ground in microtechnology, performance and portability.

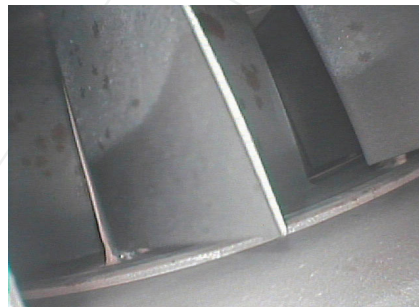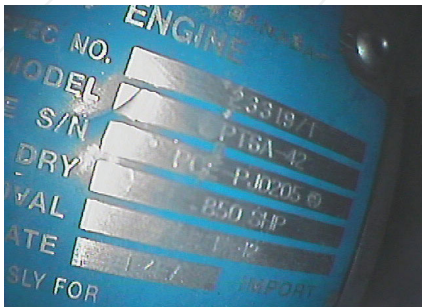

Features

- ◇ Joystick articulation control for convenient, intuitive operation
- ◇ Stand-alone imaging unit
- ◇ High navigation ability suits even the tightest areas of interest
- ◇ Adjustable brightness, contrast, hue and sharpness
- ◇ Battery-powered operation for maximum portability
- ◇ Built-in TFT monitor
- ◇ Waterproof insertion tube and tip
- ◇ High-intensity LEDs for illumination at tip

Specifications

Insertion tube working length	1.5 m (4 ft 11 in) or 3.0 m (9 ft 10 in)
Scope diameter	6.9 mm
Articulation	90° in all directions
Imaging sensor	1/6 in es-H2 CCD
Brightness AGC	0 to +34 dB
Base unit LCD	2.4 in color digital TFT 480 × 234 pixels
Storage media	Removable microSD card 2 GB max
Capacity with 1 GB card	About 500 images or 60 minutes of video
Still image	JPEG, 640 × 480 pixel
Video recording	AVI MPEG, 640 × 480 pixel 15–30 fps
Image playback	Thumbnail grid (9/page)
Video playback	Play, pause, fast forward, rewind
Video output	Via NTSC output jack
Output port	USB 2.0
Power supply	6 V dc (4 AA batteries), 2.5 W
Operating time	About 2 hours
Operating temp.	–20 to +120 °F (–30 to +50 °C)
Weight	20 oz, including batteries



CONTACT US TODAY

To schedule a demonstration, or for more information, including pricing and availability on this or any of our products, [call](#), [e-mail](#) or visit us [online](#).

